

Page 1 of 14

Zyxel WEEE 3R REPORT

Zyxel WEEE program – Evaluation of Recyclability and Recoverability rate for Zyxel Networked equipment

EU Directive 2012/19/EU

Zyxel Communications Corporation Company name....: No. 2, Gongye E. 9th Road, Hsinchu Science Park, Address: Hsinchu, Taiwan, R.O.C. Quality System Management Department: ZQ20191225002 Report No.: 1.0 Version....: 2019-12-25 Issue date: 2019-11-28 to 2019-12-25 Reporting period: IT and Telecommunications equipment Product category: Dual-Band Wireless AC/N VDSL2 IAD with USB Test Object: VMG8825-B50B Model name: VMG8825-B50B-EU01V1F P/N no.: **ZYXEL** Trademark: External Power Supply Power supply (I/O) AC 100-240V, 50/60Hz, 0.8A Rating(s): Standard....: Zyxel WEEE program is based on following: Directive 2012/19/EU (WEEE Recast) A guide to the marketing, product development and manufacturing actions you need to take IEC 62635 Test Report Form No.: Zyxel TRF52001_2013-02-06 / Ver. 1 Number of pages (Contents): 12 pages Number of pages (Attachments): 4 pages Reported by: Vic Chuang Approved by : Cindy Chan



Page 2 of 14

INDEX

1. ABBREVIATIONS USED IN THE REPORT	3
2. GENERAL DESCRIPTION OF PRODUCT	4
3. DISASSEMBLING INFORMATION	6
4. CALCULATION RESULT	9
<u>ATTACHMENT</u>	
ATTACHMENT A : PLASTIC MATERIALS MARKING	12
ATTACHMENT B : IDENTIFIED FOR SELECTIVE TREATMENT	13
ATTACHMENT C: REGISTRATION RESPONSIBILITY	15



Page 3 of 14

1. Abbreviations used in the report

Abbr.	Full name			
QMD	Quality Management Department			
3R	Reused, Recycle, Recovery			
МВ	MotherBoard			
PSU	Power supply unit			
M _(i)	Mass of ith part (ref.: IEC/TR 62635:2012)			
RCR _(i)	Recycling rate of the ith part in the corresponding end-of-life treatment scenario (ref.: IEC/TR 62635:2012)			
RVR _(i)	Recovery rate of the ith part in the corresponding end-of-life treatment scenario (ref.: IEC/TR 62635:2012)			
MEEE	Total product mass (ref.: IEC/TR 62635:2012)			
Recyclability	Ability of waste product to be recycled, based on actual practices			
Recoverability	Ability of a waste product to be recovered, based on actual practices			
EoL	End-of-life			



Page 4 of 14

2. General description of Product



Copy of Marking plate:



Characteristic data:

Product total weight: 743.73g (Adaptor included)

556.93g (Adaptor excluded)

Product dimension: L:258mm * W:32mm * H:180mm



Page 5 of 14

Normative reference:

Directive 2012/19/EU

IEC/TR 62635:2012, Ed.1

ISO 11469:2000 Plastics — Generic identification and marking of plastics products

ISO 1043 Plastics — Generic identification and marking of plastics products

Part 1: Basic polymers and their special characteristics

Part 2: Fillers and reinforcing materials

Part 3: Plasticizers

Part 4: Flame retardants

General Remarks:

"(see remark #) refers to a remark appended to the report.

" (see appended table)" refers to a table appended to the report.

Throughout this report a point is used as the decimal separator.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced except in full without the written approval of Zyxel Communication Corporation.



Page 6 of 14

3. Disassembling information

3.1 Disassembling object:



Page 7 of 14

3.2 Derivation tree of Product

Device





Enclosure





- Top case x 1
- Bottom Case x 1
- Rubber Foot (1) x 2
- Rubber Foot (2) x 2
- Button x 1
- Sponge (1) x 1
- Sponge (2) x 1
- LENS DECO x 1
- Lens Holder x 1
- LENS x 1
- Screw x 4

PCBA





- PCBA x 1
- SFP CAGE x 1
- PCB ANT cable x 2
- PIFA antenna CBL X 1
- shielding cover (1) x 1
- shielding cover (2) x 1
- Power jack x 1
- Switch (1) x 1
- Switch (2) x 2
- USB port x 1
- RJ11(green) x 2
- RJ11(white) x 1
- RJ45(blue) x 1
- RJ45(yellow) x 1





Accessory

Adaptor



- Case x 1
- Terminal x 1
- Wire x 1
- Connector x 1
- Adaptor PCBA x 1

• RJ45 Cable



• RJ11 Cable





Page 9 of 14

4. Calculation result

Basic information:

Brand name	ZYXEL	Recycling	IT & telecommunication
		scenario	
Model name	VMG8825-B50B	Product total	743.73g
		weight	

Calculation information:

EoL info	No	Name of part	Mass (g)	Material	Recyclability mass (g)	Recoverability mass (g)
	2.1	PCBA(MB) (160cm x 240cm)	141.13	РСВА	119.9605	119.9605
	2.2	PCBA(MB) Capacitor	6.0	Capacitor (PCB)	3	5.4
	2.3	PCB ANT white cable	1.03	Electric	0.8755	1.03
	2.4	PCB ANT black cable	1.02	Wires/Cables/A	0.867	1.02
Parts for	2.24	PIFA antenna CBL	6.14	ntenna	5.219	6.14
selective treatment	3.1	Adaptor PCBA (4.8cm x 8.4cm)	66.4	РСВА	56.44	56.44
	3.2	Adaptor PCBA Capacitor	11.8	Capacitor (PCB)	5.9	10.62
	4.3	Adaptor wire	27.6	Electric	23.46	27.6
	5.1	RJ45 cable	23.6	Wires/Cables/A	20.06	23.6
	5.2	RJ11 cable	17.9	ntenna	15.215	17.9
	1.1	Top case	125.2		112.68	125.2
	1.2	Botton case	118.0	ABS	106.2	118.0
	1.5	Button	0.2		0.18	0.2
	1.6	Sponge(1)	2.6	PET	2.34	2.6
	1.7	Sponge(2)	0.2	PET	0.18	0.2
Single	1.8	LENS DECO	5.8	PC	5.22	5.8
recyclable	1.9	Lens Holder	4.8	ABS	4.32	4.8
material	1.10	Lens	2.6	PC	2.34	2.6
	1.11	Screw	2.0	Stainless steel	1.98	1.98
	2.5	SFP CAGE	29.0	Copper	28.71	28.71
	2.6	shielding cover(1)	12.2	Stainless steel	12.078	12.078
	2.7	shielding cover(2)	11.2	Stainless steel	11.088	11.088
	2.8	Power jack- plastic	2.92	PA	2.628	2.92




Page 10 of 14

				i age io	01 1 1		
	2.9	Power jack-metal		1.053	Stainless steel	1.04247	1.04247
	2.10	Switch- pla	stic 1	2.72	PBT	2.448	2.72
	2.11	Switch-me	tal 1	2.38	Stainless steel	2.3562	2.3562
	2.12	Switch- plastic 2		2.84	PBT	2.556	2.84
	2.13	Switch-me	tal 2	0.21	Stainless steel	0.2079	0.2079
	2.14	USB port-p	lastic	0.59	PA (Polyamide)	0.531	0.59
	2.15	USB port-m	netal	6.63	Stainless steel	6.5637	6.5637
	2.16	RJ11(green)-	plastic	5.44	PA (Polyamide)	4.896	5.44
	2.17	RJ11(green)-	metal	0.1	Stainless steel	0.099	0.099
	2.18	RJ11(white)-	plastic	2.61	PA (Polyamide)	2.349	2.61
	2.19	RJ11(white)-	metal	0.05	Stainless steel	0.0495	0.0495
	2.20	RJ45(blue)-	olastic	2.31	PA (Polyamide)	2.079	2.31
	2.21	RJ45(blue)- metal		0.41	Stainless steel	0.4059	0.4059
	2.22	RJ45(yellow)- plastic		9.25	PA (Polyamide)	8.325	9.25
	2.23	RJ45(yellow)- metal		5.2	Stainless steel	5.148	5.148
	3.3	HEATSINK		4.8	Alminum	4.752	4.752
	3.4	Inductor wire 1		1.6	Copper	1.584	1.584
	3.5	Inductor wire 2 Adaptor Case		6.6	Copper	6.534	6.534
	4.1			52.8	PC	47.52	52.8
	4.2	Adaptor Te	minal	12.0	Copper	11.88	11.88
	4.4	Adapter con	nector	3.2	Stainless steel	3.168	3.168
Separation	1.3	Rubber Fo	ot(1)	1.2	Rubber	0.6	0.6
Process	1.4	Rubber Fo	ot(2)	0.4	(General)	0.2	0.2
Sum						$\sum {m_{(i)} xRCR_{(i)} = 656.23567}$	$\Sigma \frac{(m_{(i)}xRVR_{(i)})}{709.03717}$
Recyclability rate					$\frac{\sum (m_{(i)}xRCR_{(i)})}{m_{EEE}} \times$	100% = 88.20%	
Recoverability rate			$\frac{\Sigma(m_{(i)} \times RVR_{(i)})}{m_{EEE}} \times 100\% = 95.30\%$				



ATTACHMENT A PLASTIC MATERIALS MARKING

The main material of enclosure is "ABS" material

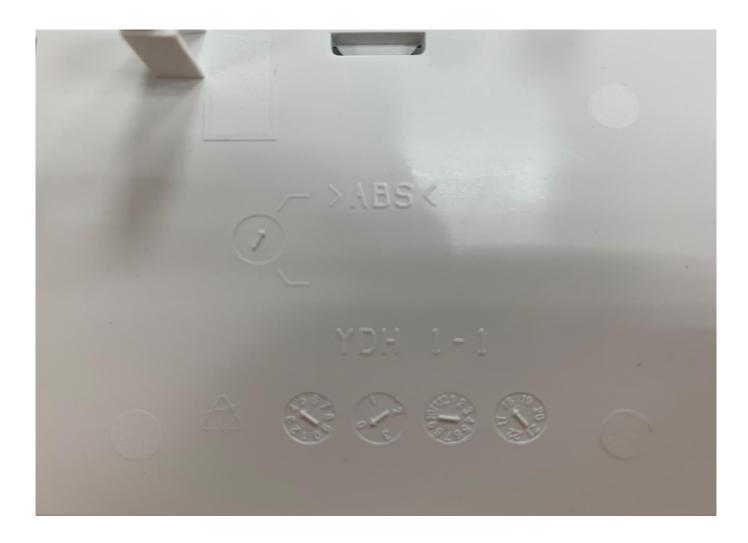



ATTACHMENT B PLASTIC MATERIALS MARKING

In the light of Annex VII on the Directive 2012/19/EU (so called as WEEE recast), selective treatment for materials and components have been defined for further specificly treatment during the end-of-life electrical and electronic equipment, which are:

No	details
1	polychlorinated biphenyls (PCB) containing capacitors in accordance with Council Directive 96/59/EC of 16 September 1996 on the disposal of polychlorinated biphenyls and polychlorinated terphenyls (PCB/PCT) (1),
2	mercury containing components, such as switches or backlighting lamps,
3	batteries,
4	printed circuit boards of mobile phones generally, and of other devices if the surface of the printed circuit board is greater than 10 square centimetres,
5	toner cartridges, liquid and paste, as well as colour toner,
6	plastic containing brominated flame retardants,
7	asbestos waste and components which contain asbestos,
8	cathode ray tubes,
9	chlorofluorocarbons (CFC), hydrochlorofluorocarbons (HCFC) or hydrofluorocarbons (HFC), hydrocarbons (HC),
10	gas discharge lamps,
11	liquid crystal displays (together with their casing where appropriate) of a surface greater than 100 square centimetres and all those back-lighted with gas discharge lamps,
12	external electric cables,
13	components containing refractory ceramic fibres as described in Commission Directive 97/69/EC of 5 December 1997 adapting to technical progress for the 23rd time Council Directive 67/548/EEC on the approximation of the laws, regulations and administrative provisions relating to the classification, packaging and labelling of dangerous substances (2),
14	components containing radioactive substances with the exception of components that are below the exemption thresholds set in Article 3 of and Annex I to Council Directive 96/29/Euratom of 13 May 1996 laying down



ATTACHMENT B PLASTIC MATERIALS MARKING

	basic safety standards for the protection of the health of workers and the general public against the dangers arising from ionizing radiation (3),		
15	electrolyte capacitors containing substances of concern (height > 25 mm, diameter > 25 mm or proportionately similar volume).		
Remark: These substances, mixtures and components shall be disposed of or recovered in compliance with Directive 2008/98/EC.			



ATTACHMENT C PLASTIC MATERIALS MARKING

According to Art. 12 & Art. 13 on the finacing in respect of WEEE from private households and non-private households. Recycling fees cover costs of collection, transportation, handling, maintenance of recycling Zyxel network and equipment as well as solvency required in the Decree.

According to Art. 16 of Directive 2012/19/EU "Registration, information and reporting". Zyxel has completed and fulfilled EU registration responsibility requirement which shall be registered through their authorised representatives, for detail, please refer to the table below.

Coutry	Registration No.	Approved compliance scheme
UK	WEE/CC0067TX (CD01/00100)	Comply Direct Ltd.
DE	71587309	EAR
DK	21229237	DPA-System

For other countries registry information, please feel free to contact with Zyxel Communications Corporation. email to: ZyXEL_Certification@zyxel.com.tw